




PANEL5000-C1042-LH

V1.1



Touch Screen Monitor

10.4" XGA Capacitive Touch Screen Monitor

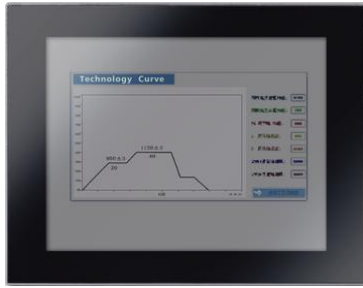


Specifications:



General	Control button	set Contrast ratio and Luminance via OSD at the back panel
	Dimensions (W x H x D)	298.5mm x 238.5mm x 47mm
	Cut out Size (W x H)	280.5mm x 220.5mm
	Box structure	Front panel: aluminum-magnesium alloy, anodized coating; Back cover: SGCC, Ground isolation protection
	Mounting	Support panel mounted, wall-mounted, Desktop (VESA 75x75 & 100x100)
	Power Supply	DC 12-24V
	Power Dissipation	6W
	Signal input	VGA & DVI-D
	NW	2.08kg
LCD	LCD Size	10.4" XGA
	Resolution	1024 x 768
	Colors	16.7MB
	Active Area (W x H)	211.2mm x 158.4mm
	Backlight	LED
	MTBF	30000hrs
	Pixel Pitch (H x V)	0.206 x 0.206
	Luminance	350cd/m2
	Contrast Ratio	900 : 1
	Viewing Angle	(L) 75/ (R) 75 / (T)75 / (B) /75
Touchscreen	Type	Multi-point capacitive touch screen
	Transmittance	> 87%
	Controller interface	USB
	Driver Support	Windows XP,Windows 7, Winows8, Windows 10, Linux
	Multi-touch	10 points (windows system)
	Surface Hardness	Mohs' 7H
Environmental	Operating Temperature	-20~60°C (-4~140°F)
	Storage Temperature	-30 ~ 80°C (-22 ~ 176 °F)
	Relative humidity	5~95% RH@40°C,non-condensing
	Vibration	Operating Random Vibration Test 5~500Hz, 1.5Grms@with SSD, follow IEC 60068-2-6
	Shock	Operating 10G peak acceleration (11ms duration), follow IEC 60068-2-27
	EMC	CE/FCC Class B
	Front Panel Protection	IP65 Compliant

Dimensions:

Unit: mm

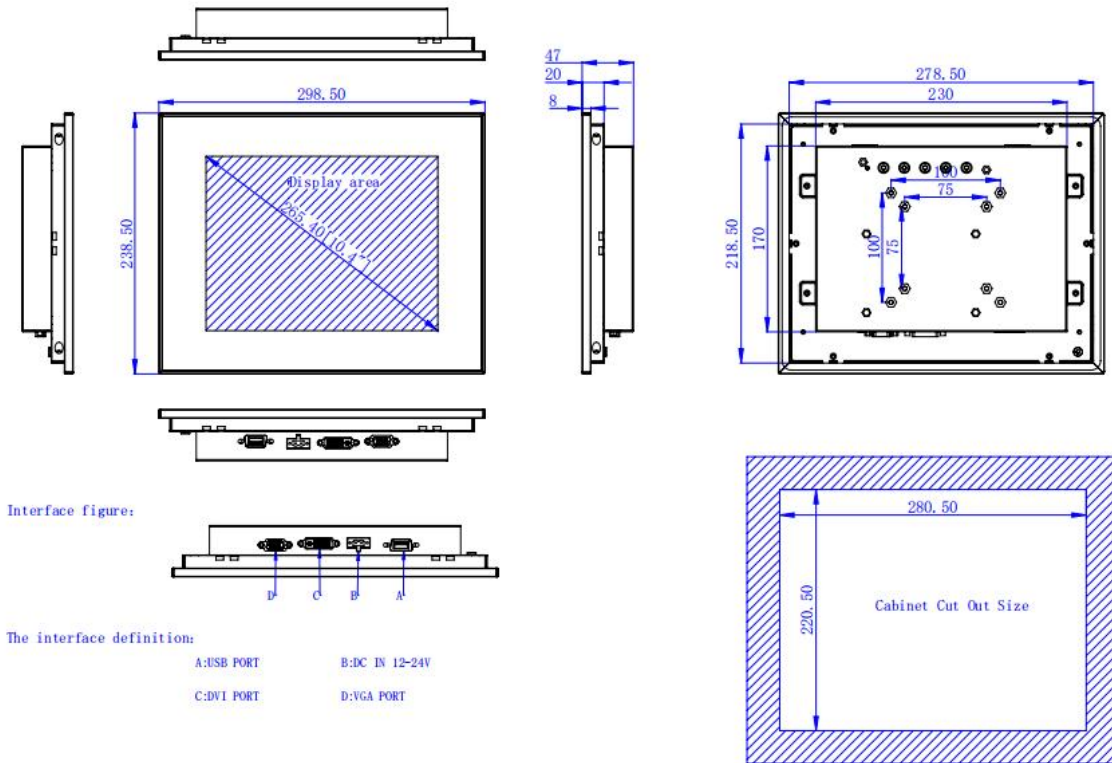

Ordering Information:

Product Code	Description
PANEL5000-C1042-LH	10.4" TFT LCD/Capacitive Touch Screen/DC12-24V input/1024*768

Packing List:

Mounting screws	4*pcs Thickness=1mm~1.2mm
Terminal	2pin Phoenix terminal
VGA Cable	1.8M
USB Cable	1.8M

Option Items:

Adapter	12V/3.33A,40W 2pin Phoenix terminal
Power Cord	1.8M/ 3M /5M
VGA Cable	3M /5M
USB Cable	3M /5M
DVI Cable	1.8M /3M /5M